

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 615 364 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.01.2001 Bulletin 2001/01

(51) Int Cl.7: **H04L 12/28, H04Q 7/18,
H04B 7/26**

(21) Application number: **94301355.7**

(22) Date of filing: **25.02.1994**

(54) **Wireless data communication system having power saving function**

Drahtloses Datenübertragungssystem mit Energiesparfunktion

Système de communication de données sans fils avec fonction d'économie d'énergie

(84) Designated Contracting States:
DE FR GB

(30) Priority: **06.03.1993 GB 9304638**

(43) Date of publication of application:
14.09.1994 Bulletin 1994/37

(60) Divisional application: **00110359.7 / 1 033 832**

(73) Proprietor: **LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)**

(72) Inventors:

- **van Bokhust, Hendrik**
NL-3862 MB Nijkerk (NL)
- **Claessen, Albertus Maria G.**
NL-3417 GP Montfoort (NL)
- **Diepstraten Wilhelmus Josephus**
NL-5087 VL Diessen (NL)

- **Haagh, Johannes Petrus N.**
NL-5627 CK Eindhoven (NL)
- **Moelard, Hendrik**
NL-3607 GT Maarssen (NL)
- **Monteban, Leo**
NL-3437 VB Nieuwegein (NL)
- **Mud, Rienk**
NL-3961 KV Wijk Bij Durstede (NL)

(74) Representative:

Buckley, Christopher Simon Thirsk et al
Lucent Technologies UK Ltd,
Intellectual Property Division,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(56) References cited:

EP-A- 0 319 219 EP-A- 0 443 516
EP-A- 0 529 269

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 615 364 B1

Description

[0001] This invention relates to methods of operating a wireless data communication system, and to wireless data communication systems.

[0002] A recent development in the field of local area networks (LANs) has been the introduction of wireless communications in such networks. Another development has been the introduction of portable, battery-operated devices for use in such wireless networks.

[0003] International Patent Application No. WO 92/19059 discloses a wireless data communication system which includes a cable-based network to which are attached controllers which maintain a portable device in communication with the network for data transfer. The portable unit transmits polling packets at regular intervals. Normally, a response packet is received from the current controller. If no response packet is received for a predetermined number of attempts the portable unit initiates a procedure for registering with a new controller. The portable unit is powered by a battery which supplies power to the unit's transceiver and packet processor via a switch. Following transmission of a polling packet, the portable unit remains fully active until a response packet is received, or until the expiry of a predetermined time period such as 10 milliseconds, and then operates the switch thereby disabling battery current to the packet processor and transceiver for a further predetermined time period, whereafter a new polling packet is transmitted. This procedure effects a power-saving function. Initially, the polling may be at a slow rate of about two second intervals, this rate being doubled each time a response packet is received. When the transmission rate is low, the polling rate is reduced, thereby reducing requirements for battery current. The power saving function is thus seen to be a complex procedure, involving the exchange of polling and response packets for each individual station, which results in inefficient use of the wireless communication medium. Furthermore, the two seconds response time is inadequate for normal network operation at current data rates. Thus, a 200 milliseconds interval is considered appropriate to ensure uninterrupted communication under the typical LLC (logical link control) layer protocols used in the majority of contemporary LAN networks. These protocols typically utilize a time-out timer having around 400 milliseconds duration, after which a transmitted packet is considered to have been lost. On expiry of such timer, the protocols will attempt a recovery procedure by retransmitting the packet a limited number of times.

[0004] EP-A-0529269 discloses a base station that broadcasts control information to mobile units. A header includes a list of mobile units that will be receiving data from the base station in the current frame, and the order in which they will receive packets. A mobile unit that is included in a header computes exactly when it should be ready to receive packets from the base station. Each receiving mobile unit goes to sleep after rescheduling to

wake itself up at its designed time for receiving data. After receiving its packets, the mobile unit goes to sleep for the remainder of an interval A at the end of which all mobile units turn their receiver ON and receive a header corresponding to an interval B.

[0005] EP-A-0319219 discloses traffic indicator information which is transmitted to a plurality of wireless stations in association with synchronizing messages.

[0006] It is an object of the present invention to provide a method for operating a wireless communication system having a power saving function, wherein efficient use of the wireless communication medium is achieved.

[0007] According to one aspect of the present invention there is provided a method as claimed in claim 1.

[0008] According to another aspect of the present invention there is provided a wireless data communication system as claimed in claim 9.

[0009] It will be appreciated that in a method and apparatus according to the invention, the synchronous operation of the power saving function enables efficient use of the wireless medium to be achieved by reducing the number of messages transmitted over the wireless medium to effect the power saving function as compared with the system disclosed in the aforementioned International Patent Application No. WO 92/19059. Also, the synchronous operation is more power efficient since the earliest possible arrival time of the synchronizing message is known in advance.

[0010] Two embodiments of the present invention will now be described by way of example, with reference to the accompanying drawings, in which:-

Fig. 1 shows a first embodiment of the invention including a plurality of mobile, battery-powered wireless stations and an access point;

Fig. 2 is a block diagram of a typical mobile station;

Fig. 3 is a block diagram of the access point;

Figs. 4 and 5 illustrate two types of traffic indicator messages;

Fig. 6 is a timing diagram showing the alternation between doze and awake states of the mobile stations according to a first scheme;

Fig. 7 is a timing diagram showing the alternation between doze and awake states of the mobile stations according to a second scheme;

Fig. 8 shows a second embodiment of the invention including a plurality of mobile, battery-powered wireless stations disposed in a so-called "ad-hoc" network;

Fig. 9 is a block diagram of a typical wireless station shown in Fig. 8;

Fig. 10 is a timing diagram showing the structure of SYNC intervals utilized in the operation of the second embodiment of the invention;

Fig. 11 is a diagram of a traffic indicator message utilized in the second embodiment; and

Fig. 12 is a timing diagram showing the doze and

awake states of stations participating in an exchange of data messages.

[0011] Referring first to Fig. 1, there is shown a block diagram of a wireless LAN system 10 embodying the present invention. The LAN system 10 includes a backbone LAN 12, which is a wired, cable-based LAN and which includes a cable 14 connecting to a base station, referred to herein as an access point 16. The access point 16 has an antenna 18. A server 19 may be connected to the cable 14 to provide a server function for devices communicating with the LAN 12. However, instead of or in addition to, the server 19, other devices or networks may be coupled to the LAN 12 to provide a communications infrastructure. Also included in the system are a plurality of mobile wireless stations 20, referenced individually as mobile stations 20-1 to 20-4. The mobile stations 20 have antennas 22, referenced individually as antennas 22-1 to 22-4.

[0012] The access point 16 has a coverage area, referred to herein as cell 24. It should be understood that additional access points (not shown), similar to the access point 16, may be connected to the cable 14 and form part of the LAN 12. Each mobile wireless station communicates with only one access point at any one time, depending on which cell the station is currently located in. This is effected by providing a cell identification portion in messages transmitted in the system. When a mobile station 20 moves from one cell 24 to another cell, a handover procedure is effected to hand over communications to a new access point. In a modification, the access point 16 is not connected to a backbone LAN, but has as its sole function the regulation of the traffic within its associated cell 24.

[0013] Referring now to Fig. 2, there is shown a simplified block diagram of a mobile station 20. The mobile station 20 includes a wireless transceiver 30 coupled to the antenna 22 and to a bus 32. The mobile station 20 also includes, connected to the bus 32, a processor 34 and a memory 36. Other devices such as a keyboard (not shown) and a display (not shown) may be connected to the bus 32, to enable the mobile station 20 to function as a hand-held data processing device. The mobile station 20 may be configured to generate as a hand-held wireless scanner by providing a suitable scanning device (not shown) in the station 20. The mobile station 20 is battery powered, and includes a battery power source 40 connected to a power line 42, which supplies power to the components of the mobile station 20. The power line 42 is connected to supply continuous power to the processor 34 and memory 36. However, power is supplied to the wireless transceiver 30 via a switch 44 which operates under the control of a doze timer 46 and power management circuit 47. In this connection, it should be understood that the transceiver 30 of the station 20 is either in an awake state or in a doze state, dependent on the state of the switch 44. In the awake state the transceiver 30 is fully powered, and capable of receiving

or transmitting messages. In the doze state, the transceiver 30 is operated at a much lower power level and is not capable of receiving or transmitting messages. In the doze state the transceiver 30 consumes significantly less power than when in the awake state. The switch 44 is switched on to initiate an awake state in response to the timing out of the doze timer 46, and is switched off to initiate a doze state by the power management circuit 47 at appropriate times as will be explained hereinafter. The station 20 is operable in either a continuous-active mode, in which the station is always in the awake state, or in a power-save mode, in which the station alternates between doze and awake states in a manner which will be explained in more detail hereinafter. The access point 16 maintains a record of the operational mode (continuous-active or power-save) of each station in its cell 24. It should be understood that, in the power-save mode, all messages are transmitted via the access point 16, that is, direct message transmission between two stations is not possible.

[0014] Referring now to Fig. 3, there is shown a simplified block diagram of the access point 16. The access point 16 includes a wireless transceiver 50 coupled to the antenna 18 and to a bus 52. A further transceiver 54 connected to the bus 52 connects the access point 16 to the cable 14 of the backbone LAN 12 (Fig. 1). Also connected to the bus 52 are a processor 56, a memory 58, a packet buffer 60 and a TIM timer 62, the operation of which will be described hereinafter. In the aforementioned modification, where the access point 16 is not connected to a backbone LAN, the transceiver 54 is unnecessary and may be omitted.

[0015] The operation of the mobile stations 20 in the power-save mode will now be described. The present invention enables a significant reduction in power consumption during the periods when a station is not transmitting or receiving messages, by switching the station to the doze state for a considerable part of this time. Reductions of more than 90% may be achieved. In operation, when a mobile station 20 is initially powered-up, it is put in the awake state, until it receives a TIM message (traffic indicator message) from the access point. It should be understood at this point that the access point 16 broadcasts TIM messages at regular intervals (such as every 200 milliseconds), under the control of the TIM timer 62 (Fig. 3).

[0016] Referring briefly to Figs. 4 and 5, there are shown two formats for the TIM messages. In the first format shown in Fig. 4, the TIM message 70 includes a header portion 72, a broadcast message indicator portion 74, destination address portions 76, 78 etc. indicative of station addresses for which the access point 16 has messages stored in its buffer 60, and a check portion 80. The header portion 72 contains a conventional preamble portion, a cell identification portion, an identification of the TIM message as a broadcast packet, and a type field which indicates that the message is a TIM message. The header may also contain other portions

which are not pertinent to the present invention and therefore will not be described herein.

[0017] The second format of a TIM message is shown in Fig. 5. This second format TIM message 90 includes a header portion 92 similar to the header portion 72 (Fig. 4), a broadcast indicator portion 94, and a broadcast count portion 96, which represents the number of broadcast messages buffered in the access point 16. The TIM message 90 further includes for messages buffered in the access point 16, an identification of the destination addresses and the number of messages for each destination address. Thus the message portions 98, 100, 102 and 104 represent that there are pending messages for two destination addresses, and include counts representing the number of messages pending for the respective destination addresses.

[0018] The operation of the system in a first type of power-save mode, which is referred to as a "stay awake" mode will now be described with reference to Figs. 4 and 6. In this "stay awake" mode, the mobile stations which have received a message will stay awake until the next TIM message is received. Referring to Fig. 6, there is shown a timing diagram for the access point 16 and four mobile stations 20-1 to 20-4, referred to as stations 1, 2, 3 and 4, respectively. The top line of Fig. 6 illustrates the transmission by the access point 16 of eight TIM messages TIM-1 to TIM-8. The dashed arrowed portions 120-1 to 120-7 represent the operation of the TIM interval timer 62 (Fig. 3). Thus the TIM interval timer 62 is initiated after each transmission of a TIM message, and after the expiry of the TIM timer (eg. after a 200 millisecond interval), the transmission of a new TIM message is initiated. It will be appreciated that as a result of medium access protocol requirements, the actual times at which TIM messages are transmitted may vary slightly.

[0019] Referring again to Fig. 6, it is assumed that the first TIM message TIM-1 indicates that no messages are to be transmitted by the access point 16. The receipt at the mobile stations 1 to 4 of the TIM-1 message triggers the respective doze interval timers 46 (Fig. 2) at the stations, and causes all these stations to go to the doze state for intervals represented by the dashed line intervals 130-1, 132-1, 134-1 and 136-1. At the end of these intervals each station 1 to 4 is switched to the awake state. It will be appreciated that the duration of the doze interval is chosen such that the station transceiver is in the awake state prior to the earliest time that the next TIM message can arrive. This ensures that no TIM message is lost due to a late switching to the awake state.

[0020] Proceeding with the operational description, it is assumed that the next TIM message TIM-2 indicates that messages are to be transmitted to stations 1 and 2. Thus, stations 1 and 2 remain awake at least until the reception of the next TIM message, and their doze timers are not effective. A message to station 1 is transmitted during time interval 140, the receipt thereof resulting in a data interrupt to the processor of station 1, as shown

by arrow 142. During time interval 144, a message for station 2 providing a data interrupt to its processor as shown by arrow 145. During time interval 146, a second message for station 1 is transmitted, the receipt thereof resulting in a data interrupt to the processor of station 1, as shown by arrow 148. It should be understood that since stations 1 and 2 remain awake at least until the reception of the next TIM message, then any messages that arrive at the access point in the current TIM interval before the transmission of the next TIM message can also be transmitted during such current TIM interval to stations (such as stations 1 and 2) which are awake during that interval.

[0021] It is assumed that the next TIM message, TIM-3, indicates that there is a message for station 1 only. Thus, station 1 remains awake for the duration of the next TIM interval, whereas station 2 returns to the doze state and triggers its doze interval timer as shown by dashed line interval 132-3. A message for station 1 is transmitted during time interval 150, and the receipt thereof resulting in a data interrupt to the processor of station 1 as shown by arrow 152. The next TIM message, TIM-4, indicates that there are no messages for transmission to any of the stations. Consequently all four stations return to the doze state until the expiry of their doze interval timers, as shown by dashed time intervals 130-4, 132-4, 134-4, and 136-4.

[0022] The next TIM message, TIM-5, indicates that a broadcast message is to be sent, such a message being intended for reception by all the stations. Thus, upon receiving the message TIM-5, all four stations 1 to 4 remain awake for the duration of the next TIM interval. The broadcast message is transmitted during the time interval 160 and data interrupts are generated for stations 1 to 4 as shown by arrows 162, 164, 166 and 168, respectively. The next TIM message, TIM-6, indicates that a message is to be transmitted to station 2. Thus, stations 1, 3 and 4 return to the doze state as shown by dashed line intervals 130-6, 134-6 and 136-6, whereas station 2 remains in the awake state for receipt of the message during time interval 170, a data interrupt being provided as shown by arrow 172.

[0023] It should be noted that the described procedure is self-synchronizing, in that if a TIM message missed, eg. through interference, a station which missed that message stays awake until the next TIM message, and synchronizes thereon. This is shown by the X mark 180 shown for station 4 which misses reception of TIM message TIM-7, but resynchronizes upon reception of TIM message TIM-8.

[0024] The operation of the system in a second type of power-save mode, which is referred to as "back-to-doze" mode will now be briefly described with reference to Figs. 5 and 7. Fig. 5 shows the format of the TIM message 90 for the "back-to-doze" mode. The TIM message 90 contains, as mentioned above, an indication of the number of messages destined for each station designated to receive messages in the TIM message. Since

the operation in the back-to-doze mode is somewhat similar to the operation in the stay-awake mode, a full description is considered unnecessary, and only the differences will be briefly described. Thus according to Fig. 7, the TIM message TIM-2 indicates that two messages are to be transmitted to station 1 and one message to station 2. Such messages are transmitted during time intervals 140, 144 and 146. When station 2 has received its single message it returns to the doze state for the remainder of the current doze interval, as shown by level 190. Similarly, when station 1 has received its two messages it returns to the doze state for the remainder of the doze interval, as shown by level 192. The subsequent operation of each station is similar, the doze state being resumed after reception of all the messages destined for that station for the remainder of the doze interval. It will, of course, be appreciated that in the back-to-doze mode, all messages that arrive at the access point 16 for wireless transmission to a station must be buffered at the access point until the next TIM message is sent.

[0025] Although, in the above description, it has been assumed that the stations 20 are operating in power-save mode throughout, it will be appreciated that it is possible that a station 20 can dynamically select to be in power-save mode or continuous-active mode, the access point 16 being informed of all mode changes. When a station 20 is operating in continuous-active mode, the message buffering system is by-passed and messages are sent to the station directly when they arrive. Where data traffic to a station is predictable to a certain extent, an automatic procedure may be employed to keep the station in continuous-active mode prior to the expected traffic, and return it to power-save mode when no further traffic is expected. Thus, for example, each time a station 20 sends a message (via the access point 16) it could be controlled to remain in continuous-active mode for a predetermined time, sufficient to allow for a response message to be received in normal circumstances. The access point 16, upon detecting that the station has sent a message, marks it as being a continuous-active mode and waits for the station to indicate explicitly that it has returned to power-save mode. The station, upon detecting that no further traffic is expected, or upon expiration of a fixed interval timer, sends an explicit message to the access point 16 to indicate a return to power-save mode, and the station then returns to power-save mode. In a modification, to avoid the transmission of an explicit message to the access point 16, the access point 16 and mobile station 20 can both utilize so-called holdover timers (described in more detail hereinbelow in connection with the second embodiment of the invention). The station 20, upon transmission of a data message, starts a holdover timer (not shown) and stays in continuous-active mode until the expiration of that timer. With each transmission, the timer is restarted. The access point 16 can employ a similar arrangement to know when a station 20 is still in continuous-active mode and when it has returned to power-save mode.

It will be appreciated that when utilizing this modified procedure, the mobile station 20 will be interpreting TIM messages even while it is in continuous-active mode.

[0026] Referring now to Fig. 8, there is shown a second embodiment of the invention. The second embodiment relates to a so-called "ad-hoc" network 210, that is, a plurality of battery-powered mobile wireless stations 220, referenced individually as mobile wireless stations 220-1, 220-2, 220-3 and 220-4. These stations are situated within a coverage area or cell 224 such that all stations 220 can communicate directly with one another. The stations 220 have antennas 222, referenced individually as antennas 222-1, 222-2, 222-3 and 222-4.

[0027] Referring to Fig. 9, there is shown a simplified block diagram of a mobile wireless station 220. The mobile station 220 includes a wireless transceiver 230 coupled to an antenna 222 and to a bus 232. The mobile station 220 also includes, connected to the bus 232, a processor 234, and a memory 236. Other devices such as a keyboard (not shown) and a display (not shown) may be connected to the bus 232 to enable the mobile station 220 to function as a hand-held data processing device. Other functions, such as a wireless hand-held scanner, are also possible for the station 220. The mobile station 220 is battery powered, and includes a battery power source 240 connected to a power line 242, which supplies power to the components of the mobile station. The power line 242 is connected to supply continuous power to the processor 234, memory 236 and other devices. However, power is supplied to the wireless transceiver 230 via a switch 244 which operates under the control of a doze timer 246 and power management circuit 247. It will be appreciated that the components of the mobile wireless station 220 described thus far correspond to components of the mobile wireless station 20 (Fig. 2). However, the mobile wireless station 220 also contains a message buffer 248 used to store messages, as will be described hereinafter, a PSYNC timer 250, a transmit holdover timer 252 and a receive holdover timer 254.

[0028] In a similar manner to that described for the first embodiment, the mobile wireless station 220 can operate either in a power-save mode, or in a continuous-active mode. In the power-save mode, the station 220 can be in an awake state, in which it is fully operational, or in a doze state, in which the wireless transceiver 230 operates at a reduced power level.

[0029] The network 210 operates in accordance with a power saving scheme, the principles underlying which will now be described. At initial start-up, one of the stations 220, assumed here to be the station 220-1, will assume the role of master station, and commences to transmit PSYNC messages (to be described) at regular intervals. The PSYNC messages are broadcast messages and therefore received by all stations. Preferably, each station 220 initially listens for a PSYNC message

for a predetermined time, and if none is received, assumes the role of master station. The PSYNC messages include a portion identifying the message as a PSYNC message and a source address portion identifying the station 220 transmitting the message. Only one station 220 will assume the role of master station and transmit PSYNC messages.

[0030] Referring to Fig. 10, the generation by the master station of four PSYNC messages, identified as PSYNC-1 to PSYNC-4 is shown. It should be understood that after transmission of each PSYNC message, the PSYNC timer 250 (Fig. 9) is triggered at the master station to initiate a PSYNC timer interval 280, the respective PSYNC timer intervals being identified as 280-1 to 280-4 in Fig. 10. Upon the expiry of a PSYNC time interval, the transmission of the next PSYNC message is normally initiated, although the actual transmission of such next PSYNC message may be slightly delayed, as will be explained hereinbelow.

[0031] The reception of a PSYNC message at stations 220 other than the master station triggers the doze timer 246 (Fig. 9) at those stations to initiate a doze interval of low power operation. The operating periods of the doze timer 246 are identified by the timing periods 290-1 to 290-4 shown in Fig. 10, the second line of which shows the doze and awake states of a station. Thus the time dimension is split into approximately equal SYNC intervals shown for example as SYNC-1, SYNC-2 and SYNC-3 in Fig. 10. Each SYNC interval consists of a low-power period LP, shown as low-power periods LP-1 to LP-3 in Fig. 10, and a full-power period FP, shown as FP-1 to FP-3 in Fig. 10. The start of a SYNC interval and the low-power period is the detection of the PSYNC message. The duration of the low-power periods is determined by the doze timer 246 providing doze intervals 290-1, 290-2 etc. The duration of the full-power periods FP-1, FP-2 etc. is determined by the difference between the PSYNC timer intervals and the station doze timer intervals, and (as will be explained hereinafter) by the amount of traffic in the network.

[0032] When a station 220 starts participation in the network 210, it is controlled to be in the awake state until it receives a PSYNC message. The reception of the PSYNC message triggers the doze timer 246 as previously mentioned to commence timing a doze interval, with a time interval shorter than that of the PSYNC timer, and the station goes into the doze state. The doze timer 246 is triggered after every PSYNC message reception. When the doze timer 246 expires, the station switches to the awake state and waits for messages to be received.

[0033] A station 220 that wants to transmit one or more data messages to one or more other stations determines its position in the current SYNC interval. If it is in a low-power period such as LP-1 (Fig. 10) it waits until the doze timer 246 expires before transmitting, whereas if it is in a full-power period such as the period FP-1 (Fig. 10) it can immediately commence transmission. In ei-

ther case, there are two possibilities. If the station has a single short message to transmit, this can be directly transmitted to the destination station. If it has a long message or a plurality of messages to transmit, it sends PTIM (peer-level traffic indicator) messages to all the stations it wishes to transmit to and then waits until a PSYNC message is received and effects transmission of pending messages stored in its message buffer 248 (Fig. 9). A PTIM message includes an identification portion identifying the message as a PTIM message and an identification of source and destination addresses of data messages to be transmitted by the source station. Referring to Fig. 11, there is shown the basic structure of a PTIM message 400. The PTIM message 400 includes a preamble portion 402, a type portion identifying the PTIM message as such, a destination address portion 406, a source address portion 408, an (optional) data portion 410 and a CRC check portion 412. The PTIM message 400 may contain other portions which are not relevant to the present invention and are therefore not described herein.

[0034] Returning to the operation of a station which does not have messages to transmit, such a station, upon the expiry of its doze timer 246, goes into the awake state and waits for messages. There are three possibilities. The first possibility is that the first message that the station receives is a PSYNC message. This means that there is no message waiting for it, and the station returns to the doze state. The second possibility is that the station receives one or more PTIM messages. This means that one or more messages are waiting for it. The station then stays in the awake state after the PSYNC message is received until it receives the indicated messages from the issuers of all the received PTIM messages. It then returns to the doze state unless it happens to be in a full-power period, in which case the station waits for a next PSYNC message or a data message. When the receipt of data messages extends over several SYNC intervals, the doze timer 246 is restarted after each PSYNC message, in the normal way, but does not return the station to the doze state. This enables the station to stay synchronized.

[0035] The third possibility for the station waiting to receive messages is that the station receives a (short) data message, transmitted as described hereinabove. The station then stays in the awake state until it receives a PSYNC message, whereafter it returns to the doze state in the usual way.

[0036] The above operation is illustrated in Fig. 12. Thus the first line of Fig. 12 shows a succession of six PSYNC messages transmitted by the master station. Note that the master station goes into the doze state after the transmission of each PSYNC message unless it received a PTIM message. After the transmission of the first PSYNC message PSYNC-1 and before the transmission of the second PSYNC message PSYNC-2, it is assumed that one of the other stations 220, identified as transmitting station A, wishes to transmit data

messages to another of the stations 220, identified as receiving station B. The station A therefore transmits a PTIM message to destination station B. Station A then stays in the continuous active mode for a period of time, referred to as the transmit holdover time, during which it does not revert to the doze state. Thus station B can transmit data messages (such as acknowledgement messages) immediately they become available and does not have to use the PTIM synchronization procedure. The receiving station B also applies a holdover procedure by not going back to the doze state. For this purpose the station 220 (Fig. 9) includes the transmit holdover timer 252 which is restarted after each transmission. Similarly the receive holdover timer 254 is started after each receipt of a message.

[0037] When station B receives the PTIM message 300 (Fig. 12) it provides a PTIM interrupt 302 to its processor. Station A transmits a first data message 304-1 to station B, which provides a data interrupt 306-1 to its processor. Station B then transmits a message 308-1 (which may be a response or an acknowledgement message) to station A (which is maintained in the awake state as discussed previously). Station A then issues a data interrupt 310-1 to its processor. Next station A transmits a second message 304-2 to station B, which provides a second data interrupt 306-2 to its processor. Station B then transmits a second message 308-2. The sequence of message transmission and data interrupts continues as shown, with the third data message 308-3 transmitted by station B being the last transmitted data message.

[0038] It will be appreciated that if there are no data messages pending at a station at the end of a low power period LP (Fig. 10) of a particular SYNC interval, the next PSYNC message should be transmitted as soon as possible so as to keep the full-power period FP as short as possible. Thus, the difference between the time-out periods of the PSYNC timer 250 (Fig. 9) and the doze timer 246 (Fig. 9), as represented, for example, by the timing intervals 280-1 and 290-1 in Fig. 10, can be very short, as a percentage of the SYNC interval. If there are more PTIM messages to be transmitted than the normal full-power period FP would allow, it is advantageous to lengthen the full-power period, that is, delay the transmission of the next PSYNC message. Since the master station has no knowledge of what is pending at the other stations, this lengthening of the full-power period is effected by means of a medium access priority scheme, wherein PTIM messages and direct data messages are given higher access priority than PSYNC messages. This can be done where a CSMA/CA (carrier select multiple access with collision avoidance) medium access protocol is utilized, for example, by providing a relatively long back-off period for the master station if the master station senses the medium as busy when it attempts to transmit a PSYNC message.

Claims

1. A method of operating a wireless data communication system including a plurality of wireless stations (16, 20, 220), characterized by the steps of: broadcasting synchronizing messages (TIM, PSYNC) from a selected one of said stations (16, 220-1); identifying which of a number of non-selected stations of the plurality of stations (20, 220-2 to 220-4) are to receive data messages by transmitting traffic indicator information in association with said synchronizing messages from the selected station, wherein at least two non-selected stations were identified in the identifying step; operating the non-selected stations (20, 220-2 to 220-4) in an awake state of relatively high power consumption during the broadcast step and the identifying step; changing the operating state of non-selected stations (20, 220-2 to 220-4) that were not identified in the identifying step to a doze state of relatively low power consumption after the broadcasting step and the identifying step are performed; and maintaining all non-selected stations (20, 220-2 to 220-4) that were identified in the identifying step in said awake state for at least a time period beginning immediately after completion of the operating step so that one or more data messages are able to be transmitted to non-selected stations (20, 220-2 to 220-4) which were identified in the identifying step.
2. A method according to claim 1, including the steps of transmitting all data messages exchanged between said non-selected stations (20) via said selected station (16); and including in said synchronizing messages (TIM) destination identifying portions identifying non-selected stations (20) that are to receive data messages.
3. A method according to claim 2, wherein said selected station is an access point (16) communicating with a wired LAN (12).
4. A method according to claim 2 or 3, including the step of maintaining said non-selected stations (20) that are to receive data messages in said awake state at least until the reception of a next one of said synchronizing messages (TIM).
5. A method according to claim 2 or 3, including the steps of including in said synchronizing messages (TIM) a count portion identifying the number of data messages to be transmitted to the respective non-selected stations (20) that are to receive data messages; and returning said non-selected stations (20) to said doze state after the respective number of data messages have been received.
6. A method according to claim 1, including the steps

of transmitting from the selected station (220-1) traffic indicator messages (PTIM) identifying the source address of the selected station (220-1) and the destination addresses of each data message to be sent from the selected station (220-1).

7. A method according to claim 6, wherein said traffic indicator messages (PTIM) are transmitted when said selected station (220-1) is in said awake state.
8. A method according to any one of the preceding claims, including the step of operating said non-selected stations (20, 220-2 to 220-4) selectively in a power-save mode wherein said doze states and said awake states alternate, or in a continuous-active mode wherein said awake state is continuously effective.
9. A wireless data communication system, including a plurality of wireless data communication stations (16, 20, 220), characterized in that a selected one of said stations (16, 220-1) includes a synchronizing timing means (62, 250) adapted to control the transmission of synchronizing messages (TIM, PSYNC) by the selected station (16, 220-1); in that means are provided adapted to transmit traffic indicator information in association with said synchronizing messages (TIM, PSYNC); and in that a number of non-selected stations (20, 220-2 to 220-4) include switching means (44, 244) adapted to control the power supply applied to station transceiver means (50, 250), such that said number of non-selected stations (20, 220-2 to 220-4) are controlled to be in an awake state of relatively high power consumption to receive said synchronizing messages (TIM, PSYNC) and said traffic indicator information and following receipt of the synchronizing messages and the traffic indicator information (I) any non-selected stations having no data messages destined therefor are changed to a doze state of relatively low power consumption and (2) all non-selected stations having data messages destined therefor are maintained in the awake state for a time period beginning immediately after receiving the synchronizing messages and the traffic indicator messages.
10. A wireless data communication system according to claim 9, wherein said selected one of said stations (16) is an access point (16) communicating with a backbone LAN (12), and said synchronizing messages (TIM) include destination identification portions identifying stations (20) that are to receive data messages.
11. A wireless data communication system according to claim 10, wherein the switching means (44) of non-selected stations identified to receive data messages are controlled to remain in said awake

state at least until a next one of said synchronizing messages (TIM) has been received.

12. A wireless data communication system according to claim 10, wherein said synchronizing messages (TIM) include count information identifying the number of data messages to be transmitted to the respective non-selected stations (20), and said switching means (44) is controlled to return the respective non-selected stations (20) to the doze state when the specified number of messages have been received.
13. A wireless data communication system according to claim 9, wherein said selected stations (220-1) are adapted to transmit traffic indicator messages (PTIM) identifying source and destination addresses for each data message to be sent from the selected station (220-1).

Patentansprüche

1. Verfahren zum Betrieb eines drahtlosen Datenkommunikationssystems mit einer Vielzahl drahtloser Stationen (16, 20, 220), gekennzeichnet durch die folgenden Schritte: Rundsenden von Synchronisierungsnachrichten (TIM, PSYNC) von einer gewählten der Stationen (16, 220-1); Identifizieren, welche einer Anzahl nicht gewählter Stationen der Vielzahl von Stationen (20, 220-2 bis 220-4) Datennachrichten empfangen sollen, indem von der gewählten Station Verkehrsanzeigeinformationen, die den Synchronisierungsnachrichten zugeordnet sind, gesendet werden, wobei bei dem Identifizierungsschritt mindestens zwei nicht gewählte Stationen identifiziert wurden; Betreiben der nicht gewählten Stationen (20, 220-2 bis 220-4) in einem wachen Zustand mit relativ hoher Stromaufnahme während des Rundsendeschritts und des Identifizierungsschritts; Ändern des Betriebszustands nicht gewählter Stationen (20, 220-2 bis 220-4), die nicht bei dem Identifizierungsschritt identifiziert wurden, in einen Schlummerzustand mit relativ niedriger Stromaufnahme, nachdem der Rundsendeschritt und der Identifizierungsschritt durchgeführt wurden; und Halten aller nicht gewählten Stationen (20, 220-2 bis 220-4), die bei dem Identifizierungsschritt identifiziert wurden, in dem wachen Zustand für mindestens eine Zeitspanne, die unmittelbar nach dem Abschluß des Schritts des Betriebens beginnt, so daß eine oder mehrere Datennachrichten zu den nicht gewählten Stationen (20, 220-2 bis 220-4) gesendet werden können, die bei dem Identifizierungsschritt identifiziert wurden.
2. Verfahren nach Anspruch 1, mit den Schritten des Sendens aller zwischen den nicht gewählten Sta-

tionen (20) ausgetauschten Datennachrichten über die gewählte Station (16); und des Einfügens von Zielidentifizierungsteilen, die nicht gewählte Stationen (20) identifizieren, die Datennachrichten empfangen sollen, in die Synchronisierungsnachrichten (TIM).

3. Verfahren nach Anspruch 2, wobei die gewählte Station ein mit einem verdrahteten LAN (12) kommunizierender Zugriffspunkt (16) ist. 5
4. Verfahren nach Anspruch 2 oder 3, mit dem Schritt des Haltens der nicht gewählten Stationen (20), die Datennachrichten empfangen sollen, in dem wachen Zustand mindestens bis zum Empfang einer nächsten der Synchronisierungsnachrichten (TIM). 10
5. Verfahren nach Anspruch 2 oder 3, mit den Schritten des Einfügens eines Zählteils, der die Anzahl von Datennachrichten identifiziert, die zu den jeweiligen nicht gewählten Stationen (20) gesendet werden sollen, die die Datennachrichten empfangen sollen, in die Synchronisierungsnachrichten (TIM); und des Zurückführens der nicht gewählten Stationen (20) in den Schlummerzustand, nachdem die jeweilige Anzahl von Datennachrichten empfangen wurde. 15
6. Verfahren nach Anspruch 1, mit den Schritten des Sendens von Verkehrsanzeigeeinformationen (PTIM), die die Quellenadresse der gewählten Station (220-1) und die Zieladressen jeder von der gewählten Station (220-1) zu sendenden Datennachricht identifizieren, von der gewählten Station (220-1). 20
7. Verfahren nach Anspruch 6, wobei die Verkehrsanzeigeeinformationen (PTIM) gesendet werden, wenn sich die gewählte Station (220-1) in dem wachen Zustand befindet. 25
8. Verfahren nach einem der vorangehenden Ansprüche, mit dem Schritt des selektiven Betriebes der nicht gewählten Stationen (20, 220-2 bis 220-4) in einer Energiesparbetriebsart, wobei sich die Schlummer- und die wachen Zustände abwechseln, oder in einer kontinuierlich/aktiven Betriebsart, wobei der wache Zustand kontinuierlich effektiv ist. 30
9. Drahtloses Datenkommunikationssystem mit einer Vielzahl drahtloser Kommunikationsstationen (16, 20, 220), dadurch gekennzeichnet, daß eine gewählte der Stationen (16, 220-1) Synchronisierungs-Zeitsteuermittel (62, 250) enthält, die so ausgelegt sind, daß sie die Übertragung von Synchronisierungsnachrichten (TIM, PSYNC) durch die gewählte Station (16, 220-1) steuern; daß Mittel bereitgestellt werden, die so ausgelegt sind, daß sie 35

Verkehrsanzeigeeinformationen senden, die den Synchronisierungsnachrichten (TIM, PSYNC) zugeordnet sind; und daß eine Anzahl nicht gewählter Stationen (20, 220-2 bis 220-4) Schaltermittel (44, 244) enthalten, die so ausgelegt sind, daß sie die an die Stations-Sender/Empfängermittel (50, 250) angelegte Stromversorgung steuern, so daß die Anzahl nicht gewählter Stationen (20, 220-2 bis 220-4) so gesteuert werden, daß sie sich in einem wachen Zustand mit relativ hoher Stromaufnahme befinden, um die Synchronisierungsnachrichten (TIM, PSYNC) und die Verkehrsanzeigeeinformationen zu empfangen, und nach dem Empfang der Synchronisierungsnachrichten und der Verkehrsanzeigeeinformationen (1) alle nicht gewählten Stationen, die keine für sie bestimmten Datennachrichten aufweisen, in einen Schlummerzustand mit relativ niedriger Stromaufnahme versetzt werden und (2) alle nicht gewählten Stationen, die für sie bestimmte Datennachrichten aufweisen, für eine Zeitspanne, die unmittelbar nach dem Empfangen der Synchronisierungsnachrichten und der Verkehrsanzeigeeinformationen beginnt, in dem wachen Zustand gehalten werden.

10. Drahtloses Datenkommunikationssystem nach Anspruch 9, wobei die gewählte der Stationen (16) ein mit einem Backbone-LAN (12) kommunizierender Zugriffspunkt (16) ist und die Synchronisierungsnachrichten (TIM) Zielidentifizierungsteile enthalten, die die Stationen (20) identifizieren, die Datennachrichten empfangen sollen. 40
11. Drahtloses Datenkommunikationssystem nach Anspruch 10, wobei die Schaltermittel (44) nicht gewählter Stationen, die als Datennachrichten empfangend identifiziert wurden, so gesteuert werden, daß sie mindestens solange in dem wachen Zustand bleiben, bis eine nächste der Synchronisierungsnachrichten (TIM) empfangen wurde. 45
12. Drahtloses Datenkommunikationssystem nach Anspruch 10, wobei die Synchronisierungsnachrichten (TIM) Zählinformationen enthalten, die die Anzahl von Datennachrichten identifizieren, die zu den jeweiligen nicht gewählten Stationen (20) gesendet werden sollen, und die Schaltermittel (44) so gesteuert werden, daß die jeweiligen nicht gewählten Stationen (20) in den Schlummerzustand zurückkehren, wenn die angegebene Anzahl von Nachrichten empfangen wurde. 50
13. Drahtloses Datenkommunikationssystem nach Anspruch 9, wobei die gewählten Stationen (220-1) so ausgelegt sind, daß sie Verkehrsanzeigeeinformationen (PTIM) senden, die Quellen- und Zieladressen für jede von der gewählten Station (220-1) zu sendende Datennachricht identifizieren. 55

Revendications

1. Procédé d'exploitation d'un système de transmission de données sans fil, comportant une pluralité de stations sans fil (16, 20, 220), caractérisé par les étapes de : diffusion de messages de synchronisation (TIM, PSYNC) en provenance d'une station sélectionnée parmi lesdites stations (16, 220-1) ; identification des stations, parmi un certain nombre de stations non sélectionnées de la pluralité de stations (20, 220-2 à 220-4), appelées à recevoir des messages de données par transmission d'informations indicatrices du trafic en association avec lesdits messages de synchronisation en provenance de la station sélectionnée, dans lequel au moins deux stations non sélectionnées ont été identifiées dans l'étape d'identification ; exploitation des stations non sélectionnées (20, 220-2 à 220-4) dans un état d'éveil à consommation énergétique relativement élevée durant l'étape de diffusion et l'étape d'identification ; passage de l'état d'exploitation des stations non sélectionnées (20, 220-2 à 220-4) qui n'ont pas été identifiées dans l'étape d'identification à un état de sommeil à consommation énergétique relativement faible suite à l'étape de diffusion et à l'étape d'identification ; et le maintien de toutes les stations non sélectionnées (20, 220-2 à 220-4), qui ont été identifiées dans l'étape d'identification, dans l'état d'éveil pendant au moins un intervalle de temps commençant immédiatement après l'achèvement de l'étape d'exploitation de sorte qu'un ou plusieurs messages de données puissent être transmis aux stations non sélectionnées (20, 220-2 à 220-4) qui ont été identifiées dans l'étape d'identification.
2. Procédé selon la revendication 1, comportant les étapes de transmission de tous les messages de données échangés entre lesdites stations non sélectionnées (20) par le biais de ladite station sélectionnée (16) ; et d'inclusion, dans lesdits messages de synchronisation (TIM), de portions d'identification de la destination identifiant les stations non sélectionnées (20) appelées à recevoir des messages de données.
3. Procédé selon la revendication 2, dans lequel ladite station sélectionnée est un point d'accès (16) communiquant avec un réseau local (LAN) câblé (12).
4. Procédé selon la revendication 2 ou 3, comportant l'étape de maintien desdites stations non sélectionnées (20), appelées à recevoir des messages de données, dans ledit état d'éveil au moins jusqu'à la réception d'un message suivant desdits messages de synchronisation (TIM).
5. Procédé selon la revendication 2 ou 3, comportant

les étapes d'inclusion dans lesdits messages de synchronisation (TIM) d'une portion de compte identifiant le nombre de messages de données à transmettre aux stations non sélectionnées (20) respectives appelées à recevoir des messages de données ; et de renvoi desdites stations non sélectionnées (20) dans ledit état de sommeil après réception du nombre respectif de messages de données.

6. Procédé selon la revendication 1, comportant les étapes de transmission à partir de la station sélectionnée (220-1) de messages indicateurs du trafic (PTIM) identifiant l'adresse de source de la station sélectionnée (220-1) et les adresses de destination de chaque message de données à envoyer de la station sélectionnée (220-1).
7. Procédé selon la revendication 6, dans lequel lesdits messages indicateurs du trafic (PTIM) sont transmis lorsque ladite station sélectionnée (220-1) se trouve dans ledit état d'éveil.
8. Procédé selon l'une quelconque des revendications précédentes, comportant l'étape d'exploitation sélective desdites stations non sélectionnées (20, 220-2 à 220-4) dans un mode d'économie d'énergie dans lequel lesdits états de sommeil et lesdits états d'éveil alternent, ou dans un mode continuellement actif dans lequel ledit état d'éveil est continuellement en vigueur.
9. Système de transmission de données sans fil, comportant une pluralité de stations de transmission de données sans fil (16, 20, 220), caractérisé en ce qu'une station sélectionnée parmi lesdites stations (16, 220-1) comporte un moyen temporisateur de synchronisation (62, 250) adapté pour réguler la transmission de messages de synchronisation (TIM, PSYNC) par la station sélectionnée (16, 220-1) ; en ce qu'il est prévu un moyen adapté pour transmettre des informations indicatrices du trafic en association avec lesdits messages de synchronisation (TIM, PSYNC) ; et en ce qu'un certain nombre de stations non sélectionnées (20, 220-2 à 220-4) comportent un moyen de commutation (44, 244) adapté pour réguler l'alimentation appliquée à un moyen émetteur-récepteur (50, 250) de station, de sorte que ledit nombre de stations non sélectionnées (20, 220-2 à 220-4) soient commandées pour se trouver dans un état d'éveil à consommation énergétique relativement élevée en vue de recevoir lesdits messages de synchronisation (TIM, PSYNC) et lesdites informations indicatrices du trafic et, suite à la réception des messages de synchronisation et des informations indicatrices du trafic, (1) toute station non sélectionnée n'ayant aucun message de données lui étant destiné passe dans

un état de sommeil à consommation énergétique relativement faible, et (2) toute station non sélectionnée ayant des messages de données lui étant destinés est maintenue dans l'état d'éveil pendant un intervalle de temps commençant immédiatement après la réception des messages de synchronisation et des messages indicateurs du trafic. 5

10. Système de transmission de données sans fil selon la revendication 9, dans lequel ladite station sélectionnée parmi lesdites stations (16) est un point d'accès (16) communiquant avec un réseau local (LAN) dorsal (12), et lesdits messages de synchronisation (TIM) incluent des portions d'identification de la destination identifiant les stations (20) appelées à recevoir des messages de données. 10 15

11. Système de transmission de données sans fil selon la revendication 10, dans lequel le moyen de commutation (44) des stations non sélectionnées identifiées pour recevoir des messages de données est commandé pour rester dans l'état d'éveil au moins jusqu'à la réception d'un message suivant desdits messages de synchronisation (TIM). 20 25

12. Système de transmission de données sans fil selon la revendication 10, dans lequel lesdits messages de synchronisation (TIM) incluent une portion de compte identifiant le nombre de messages de données à transmettre aux stations non sélectionnées (20) respectives, et ledit moyen de commutation (44) est commandé pour renvoyer les stations non sélectionnées (20) respectives dans le mode de sommeil lorsque le nombre spécifié de messages ont été reçus. 30 35

13. Système de transmission de données sans fil selon la revendication 9, dans lequel lesdites stations sélectionnées (220-1) sont adaptées pour transmettre des messages indicateurs du trafic (PTIM) identifiant des adresses de source et de destination pour chaque message de données à envoyer de la station sélectionnée (220-1). 40 45

50

55

FIG. 1

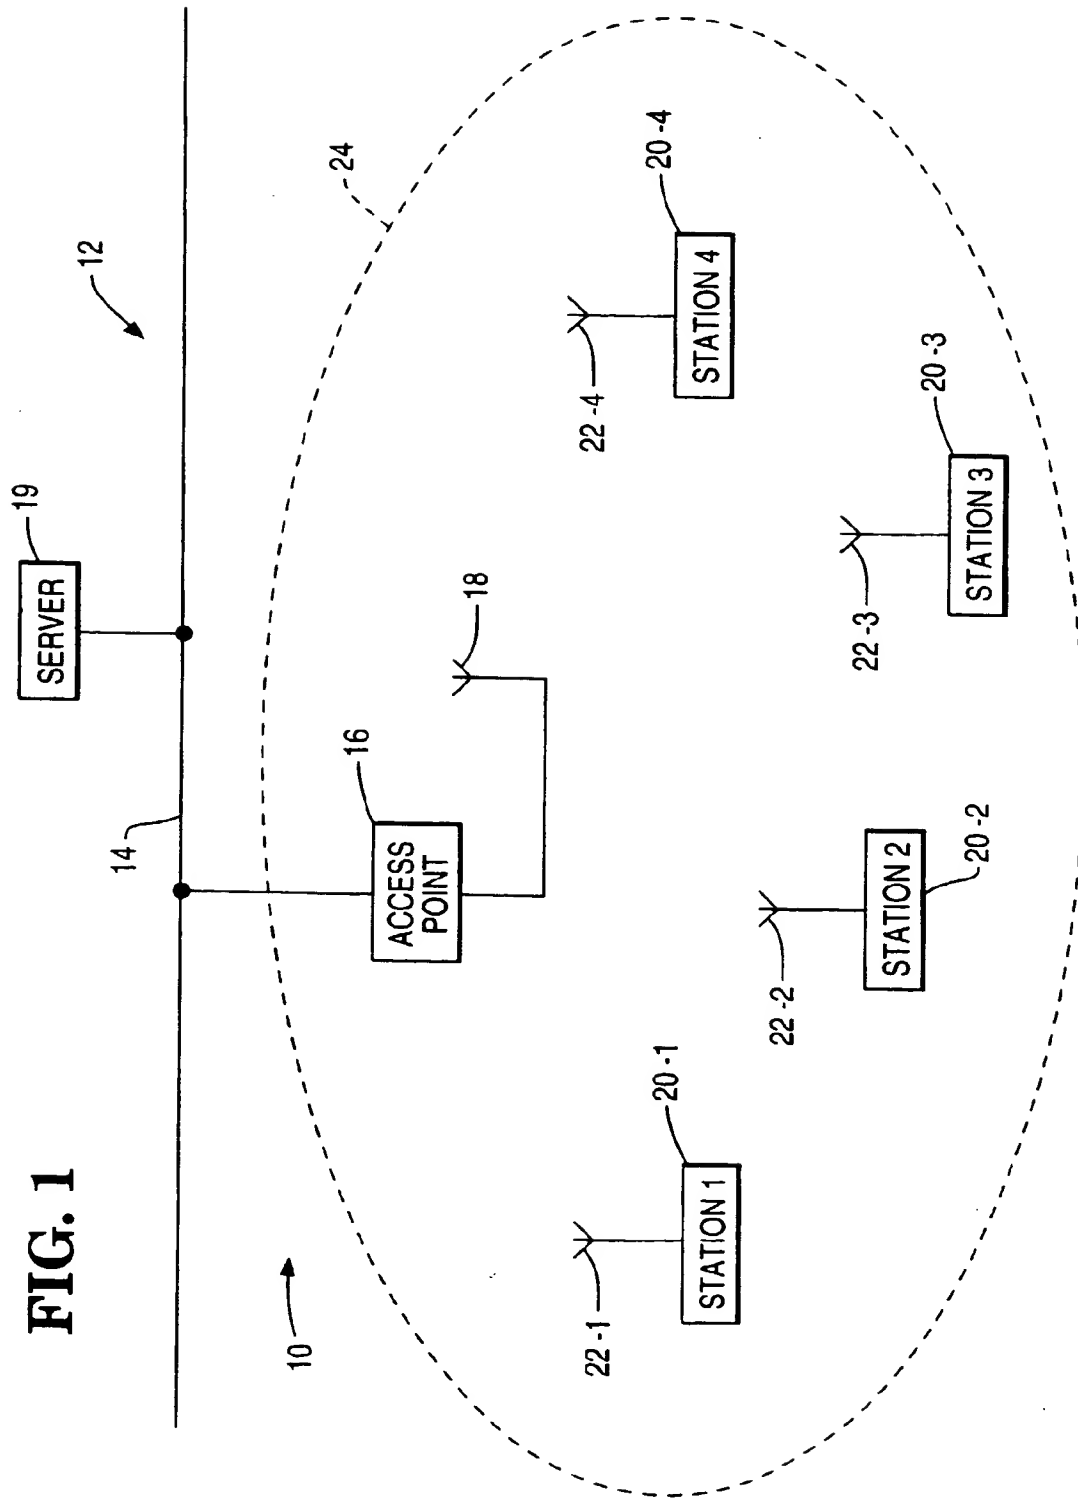


FIG. 2

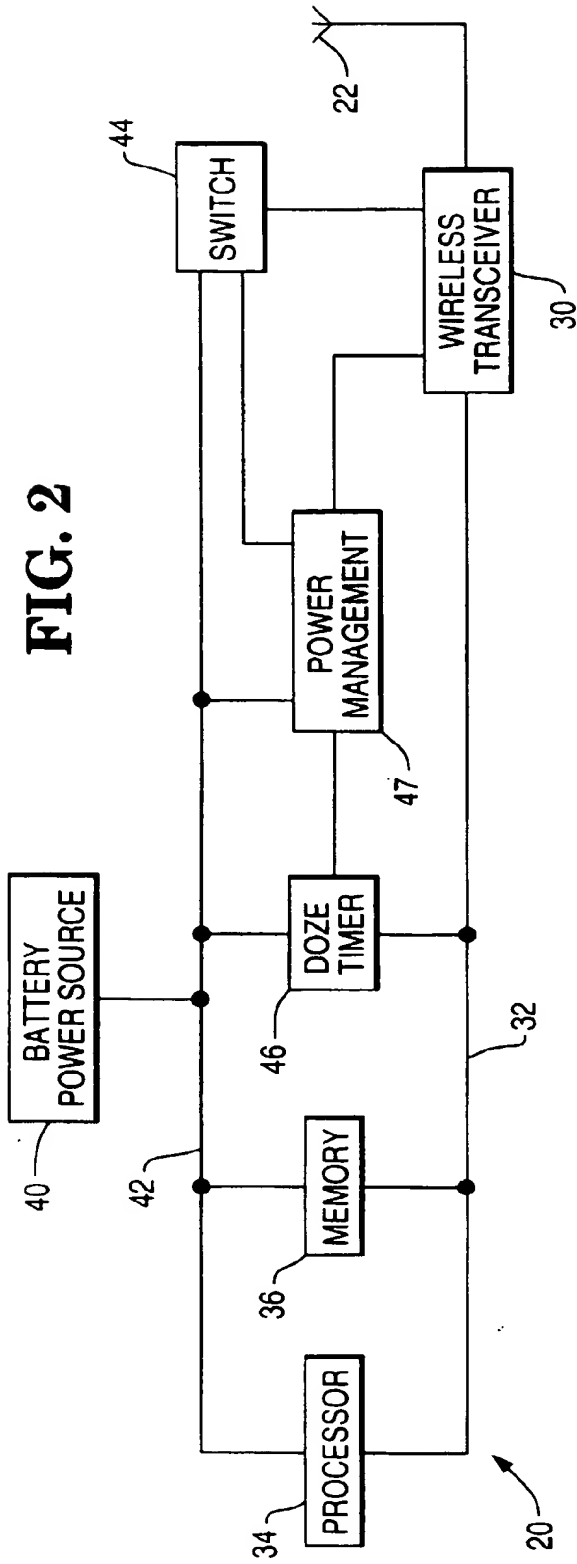


FIG. 3

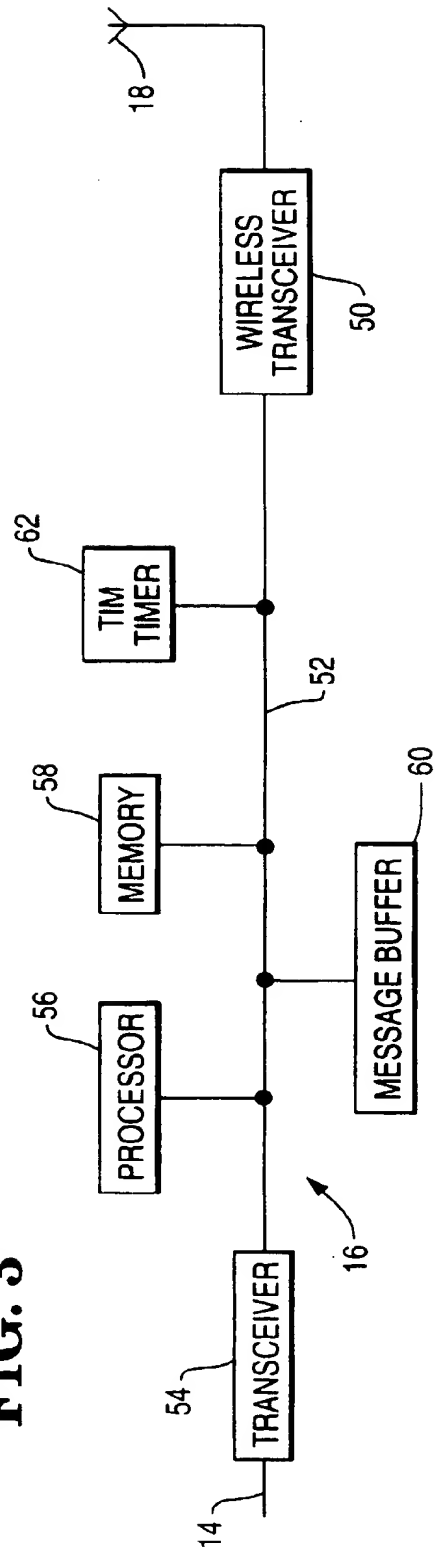


FIG. 4

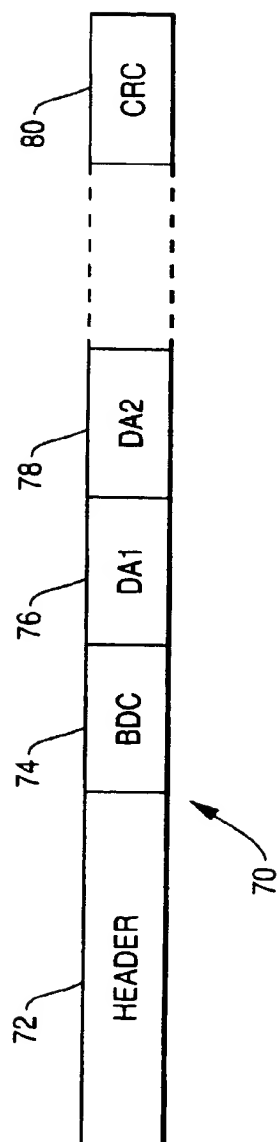


FIG. 5

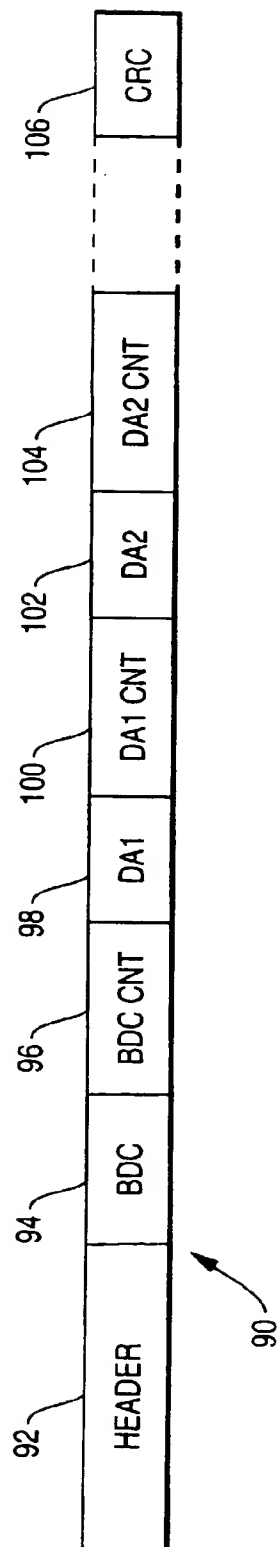


FIG. 6

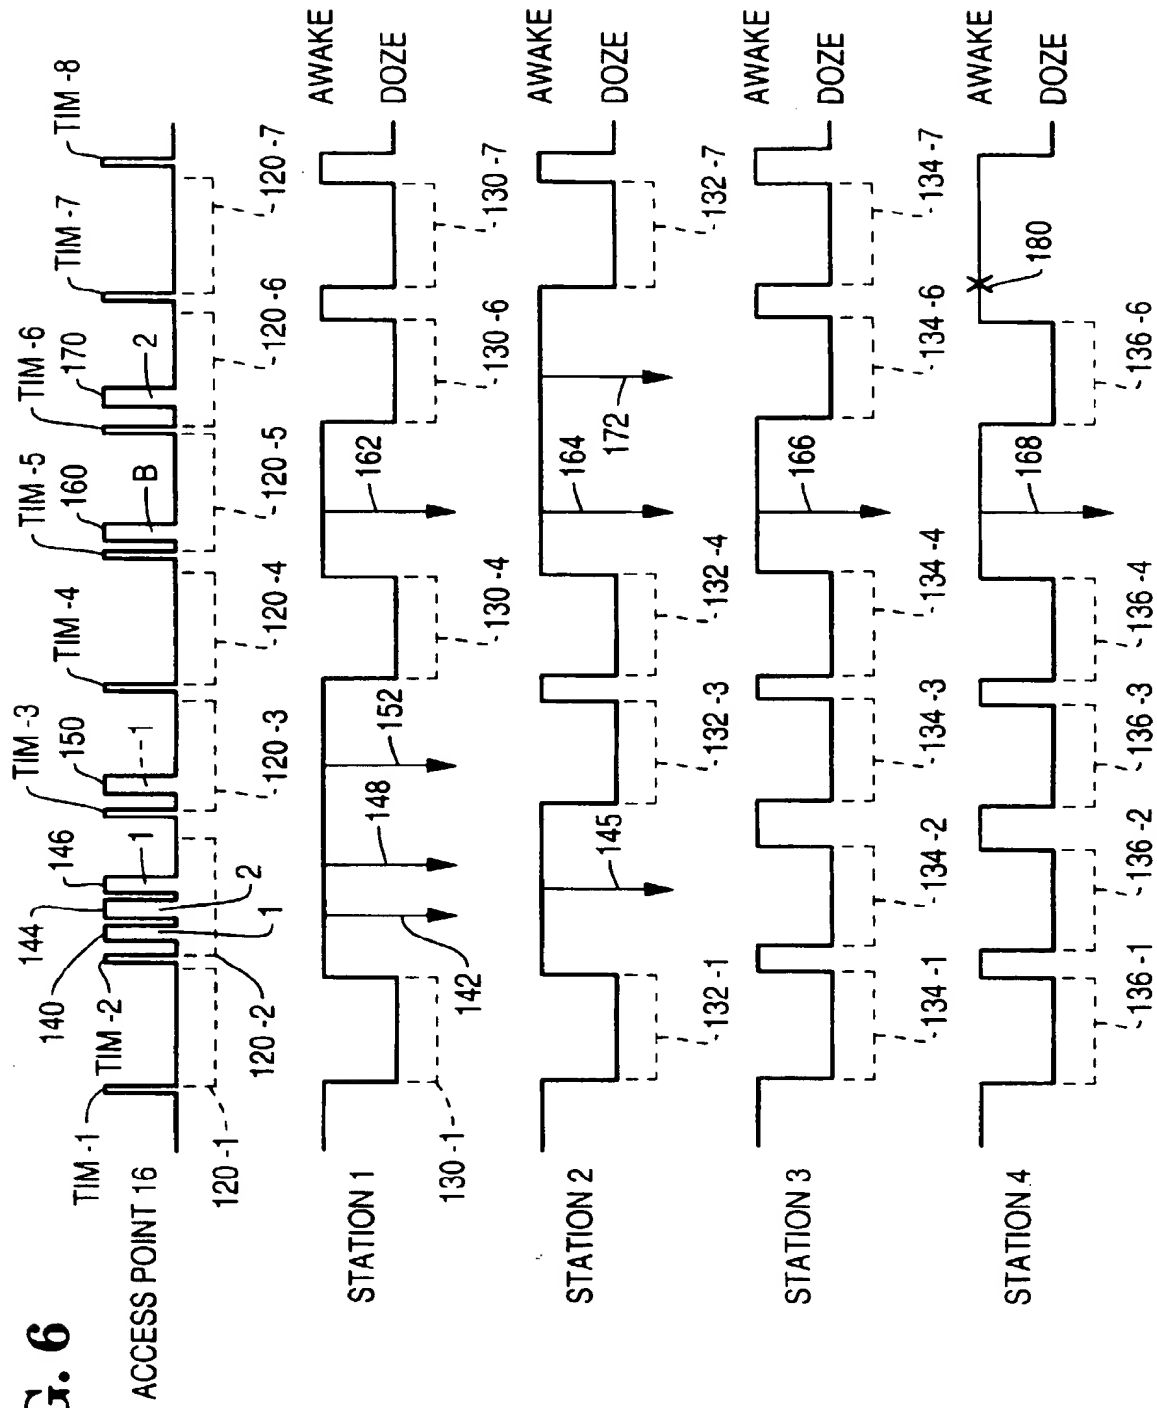


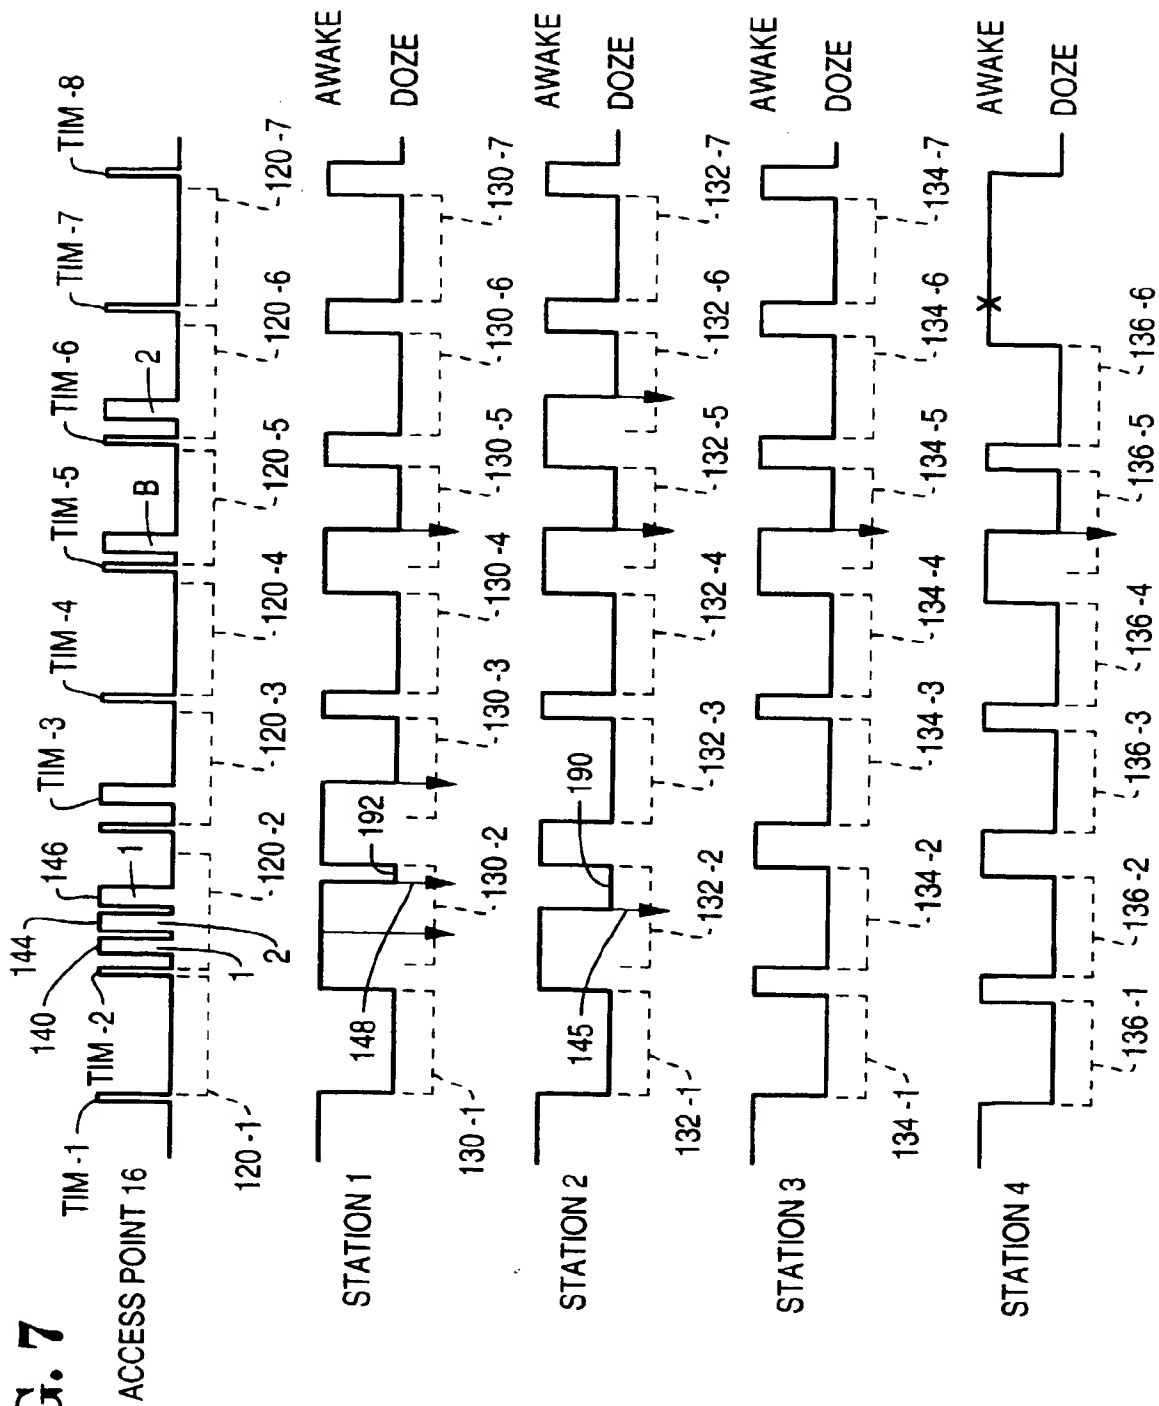
FIG. 7

FIG. 8

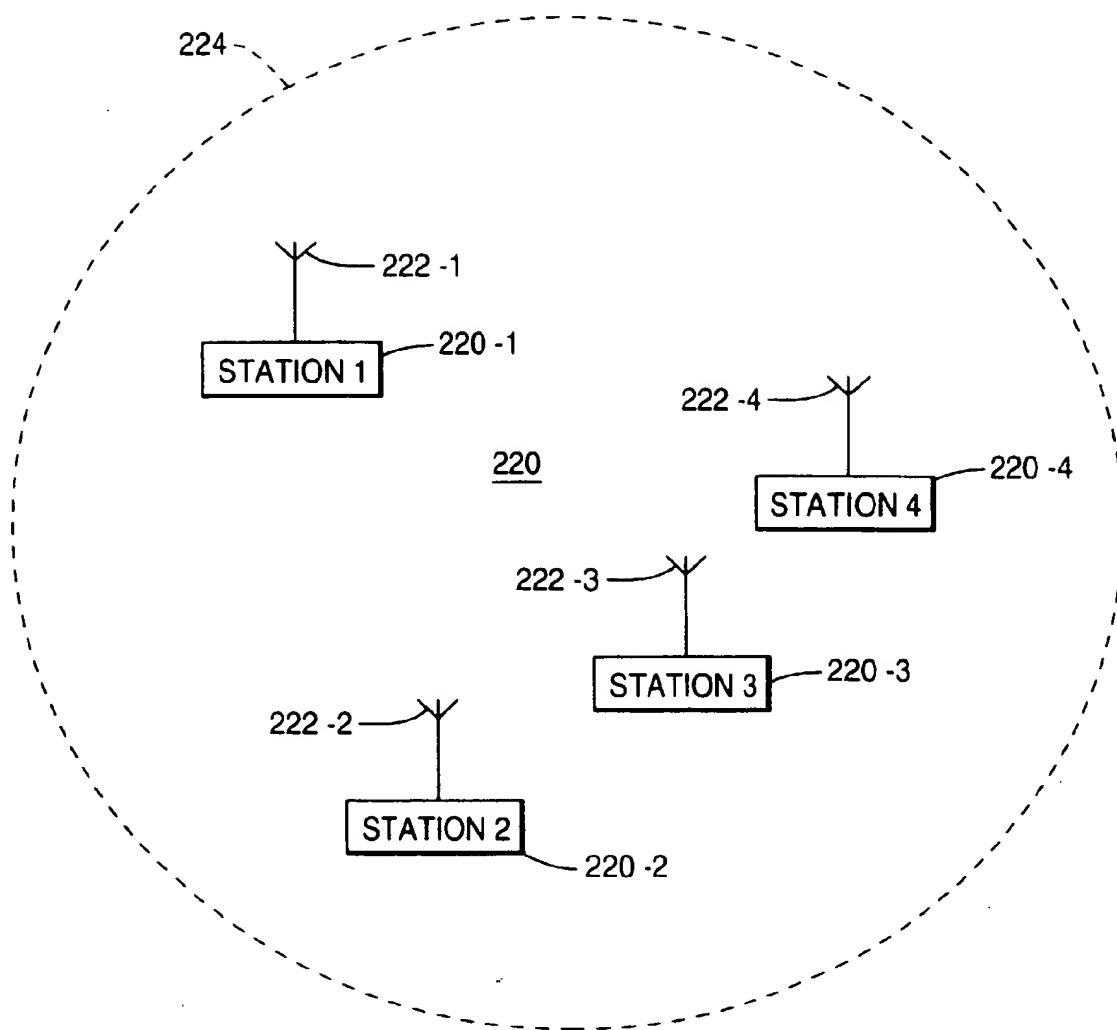


FIG. 9

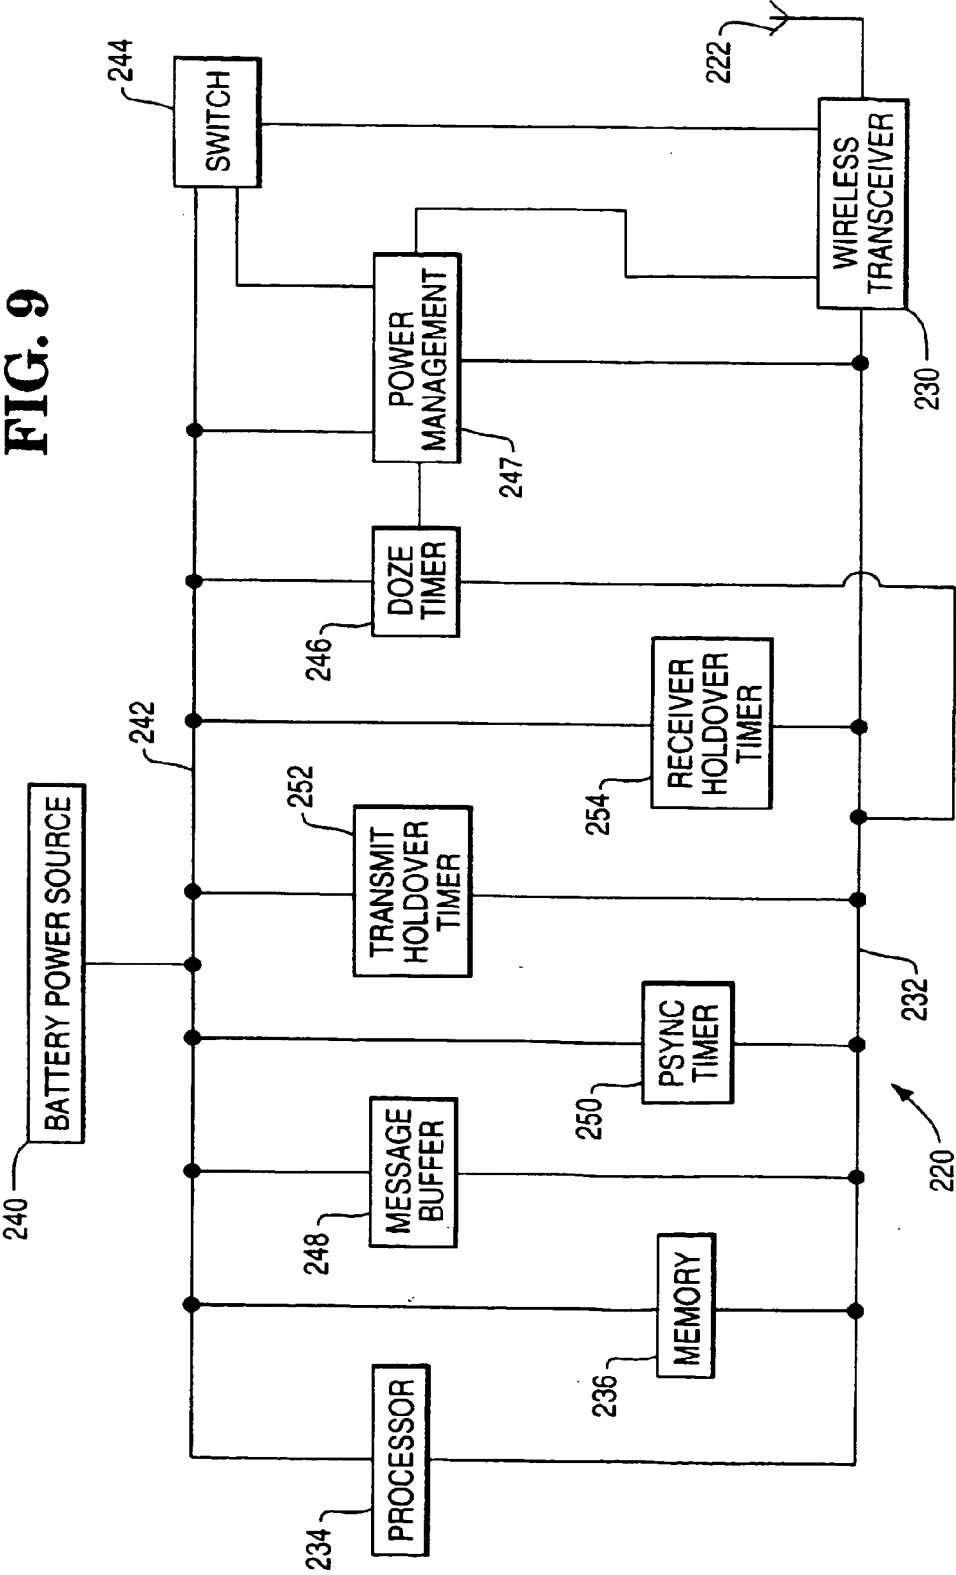


FIG. 10

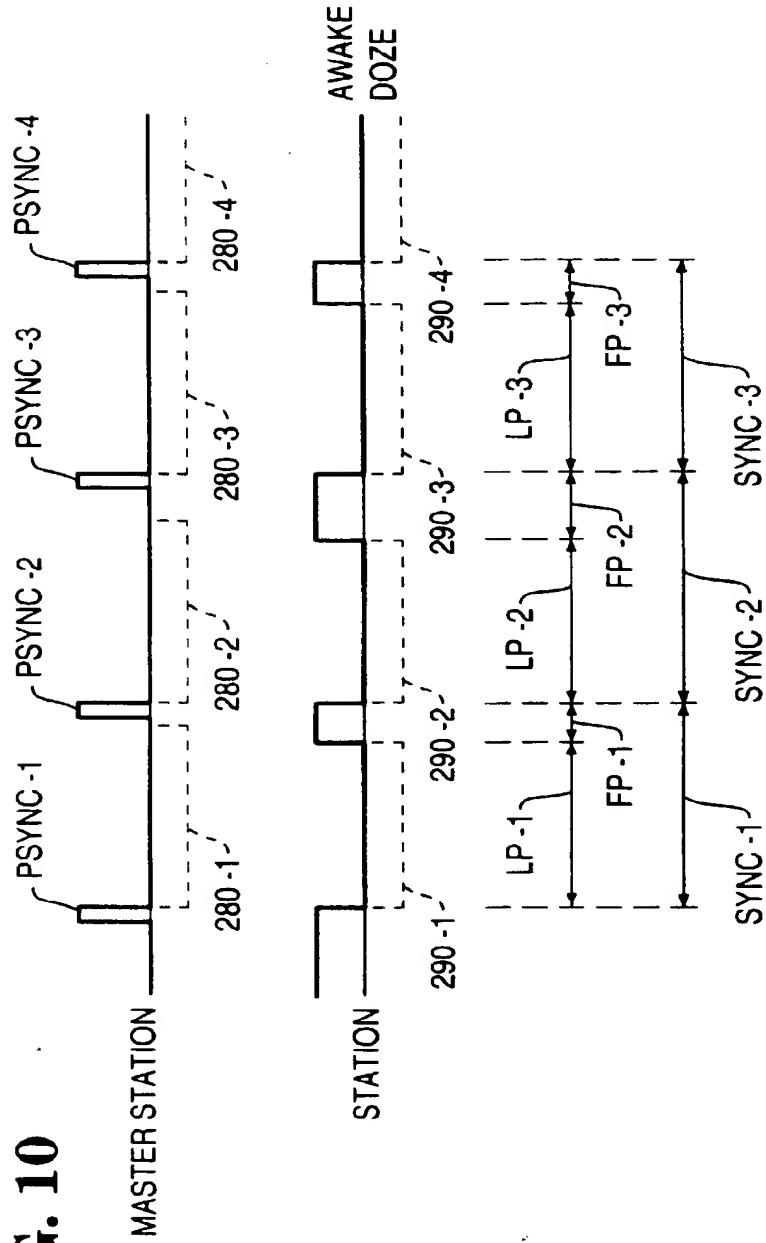


FIG. 11

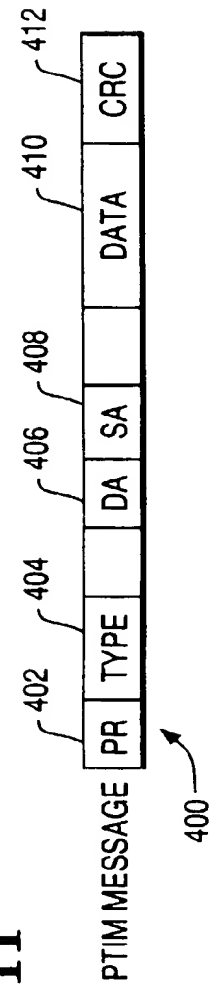


FIG. 12

